



UltraStop®

Mastic Waterstop for Concrete Construction Joints




UltraStop® is a single component; self-sealing mastic waterstop prevents moisture from penetrating NON-MOVING joints in concrete construction.

Fast and easy to install in all working temperatures, UltraStop requires no special labor skills. UltraStop provides a lasting, watertight bond to concrete surfaces.

Advantages

- Easy to install, requiring no specialized labor
- Applies in most weather conditions and temperatures
- Available in rolls to speed installation and minimize splicing
- Stays tacky and bonds to concrete with **UltraStop Primer Adhesive**
- No mechanical fasteners or split forming required
- Requires minimum concrete cover and does not create pressure which could potentially spall the concrete


UltraStop is not an expansion joint material and should not be used as one. Expansion joints must be sealed with a conventional waterstop designed to accommodate movement. Vinylex Waterstop & Accessories has alternative waterstop materials suitable for expansion joints. Contact our technical department for more information.

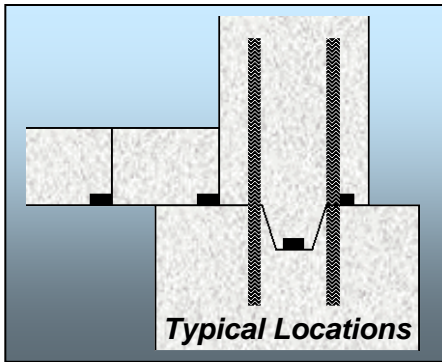

Typical Locations

Typical Applications

- Storage tanks
- Culverts
- Pipe and penetrations
- Retaining walls
- Slabs-on-grade
- Foundations

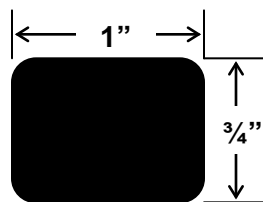

No. **KK585**

UltraStop Primer Adhesive is required to assure proper installation. Additional mechanical fasteners may be required for vertical or overhead applications.

Primer Adhesive, Installation Guide and Suggested Master Specification available



UltraStop[®]

Property	Test Method	Required Limits	Typical Values
Specific Gravity	ASTM D 71	1.15 to 1.50	1.22 to 1.30
Flash Point	ASTM D 92	350° F min.	450° F
Fire Point	ASTM D 92	375° F min.	475° F
Ash Inert Materials	ASTM D 482	25% min.	35%
Volatile Material	ASTM D 6	3.0% max.	1.2%

Packaging: (6) 16'-8" rolls per carton for a total of 100 ft. per carton.

Primer Adhesive, Installation Guide and Suggested Master Specification available

WARRANTY

Vinylex Waterstop & Accessories (VWA) warrants to the Buyer that this product will comply with the specifications provided by VWA in the specifications, brochures and sales literature applicable to VWA UltraStop, and statements made on VWA's packaging for UltraStop. Except as expressly agreed by VWA in writing customary deviations from quality shall not be a basis for a claim.

Except as expressly provided otherwise herein, VWA has made no and disclaims all warranties, expressed or implied, including the warranties of merchantability or fitness for a particular purpose.

The exclusive remedies of the Buyer and the limited liability of VWA from any and all losses or damages resulting from use of this product (including breach of contract, tort or other basis at law or in equity) shall be either the full refund of the purchase price to Buyer of this product, or the replacement of the quantity of product purchased by the Buyer – at the election of VWA. In no event shall VWA be liable for any incidental, coincidental or punitive damages. The Buyer and all users of the product are deemed to have accepted the terms of this limited warranty and may not be varied in any way by any verbal or written agreement.

